

Industrial RS-422/485 Isolated Repeater

Model BB-485OPDR

ADVANTECH

www.advantech.com



PRODUCT FEATURES

- Extends RS-422/485 data additional 1.2 km (4000 ft)
- 2000V optical isolation for data lines; 600W surge suppression
- -40 to +80 °C wide operating temperature
- DIN rail mount (panel mount with optional adapter)
- cULus Recognized, UL Recognized, CE, FCC
- 10-30 V power supply required (not included, sold separately)

Model BB-485OPDR is a 2kV optically isolated RS-422/485 line repeater that isolates a piece of equipment from the rest of the network. 600W surge suppression ensures that connected equipment is protected even in the harshest of environments.

As a repeater, it extends the distance of an existing network an additional 1.2 km (4000 ft) and expands it beyond the typical 32 node limitation. Data signals and power inputs connect to the terminal block. Supports 2-wire RS-485, 4-wire RS-485 and RS-422. Automatic Send Data Control means no software drivers required to install or manage.

Model BB-485OPDR operates on externally sourced 10 to 30 VDC power (not included, sold separately). The DIN rail mount enclosure is designed to fit easily on a standard 35mm rail.

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
BB-485OPDR	RS-422/485 2 kV Isolated Repeater

ACCESSORIES – sold separately



BB-MDR-20-24 - Power supply, 24VDC, 1.0 A output, DIN rail mount

BB-MDR-40-24 - Power supply, 24VDC, 1.7 A output, DIN rail mount

BB-DRPM25 - 35mm DIN rail to panel mount bracket adapter, 25mm wide

BB-EK-CLIP-MPC - DIN rail clip for enclosure

PRODUCT DRAWING

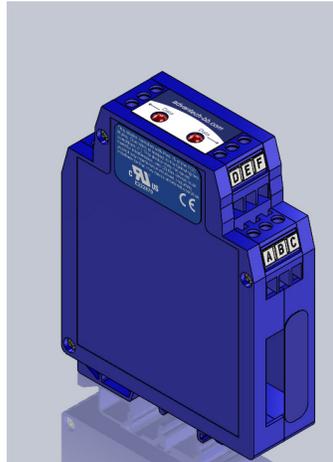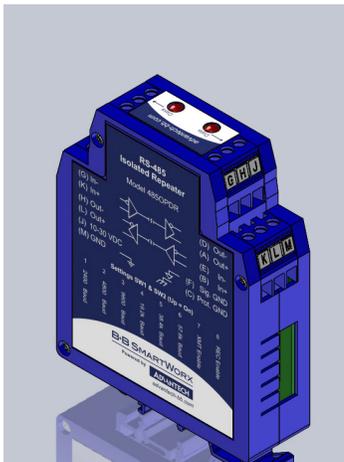

All product specifications are subject to change without notice.

BB-485OPDR_0619ds

ADVANTECH

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445

Industrial RS-422/485 Isolated Repeater

Model BB-485OPDR



ADVANTECH

www.advantech.com

SPECIFICATIONS

RS-422/485	
Connector	Terminal block
Signals	TDA(-), TDB(+), RDA(-), RDB(+), GND RS-422 4-wire, RS-485 2-wire and 4-wire. Protected GND on isolated side.
Data Rate	Up to 115.2 kbps (switch selectable)
ISOLATION	
Method	Optical
Rating	2000 V
SURGE SUPPRESSION	
Method	TVS
Rating	6.5V bi-directional avalanche breakdown device 500W peak power dissipation
Response Time	<1 pico-second
INDUSTRIAL BUS	
	Modbus ASCII / RTU
POWER	
Connector	Terminal block
Voltage	10 to 30 VDC
Power Consumption	0.7 W
Source	External source required

TERMINAL BLOCKS	
Wire Size	24 to 14 AWG
Torque	4 kgf-cm
LED INDICATORS	
2 Data LEDs (red)	Data LED for each side of isolator. Flashes when data transmitted.
ENCLOSURE	
Material	Plastic
IP Rating	20
Dimensions	2.5 x 7.9 x 10.6 cm (0.98 x 3.1 x 4.2 in)
Mounting	35 mm DIN rail (panel mount adapter, sold separately)
ENVIRONMENTAL	
Operating Temperature	-40 to +80 °C (-40 to +176 °F)
Storage Temperature	-40 to +85 °C (-40 to +185 °F)
Operating Humidity	0 to 95% Non-condensing
MTBF	225299 hours
MTBF Calc. Method	MIL217F Parts Count Reliability
APPROVALS, DIRECTIVES, STANDARDS	
Agency Approvals	CE, FCC, cULus Recognized, File E222870 UL508 UL Recognized
EU Directives	2014/30/EU – Electromagnetic Compatibility Directive 2011/65/EU – Reduction of Hazardous Substances Directive (RoHS) 2012/19/EU – Waste Electrical & Electronic Equipment (WEEE) EN 55032:2015 – Class A, Electromagnetic compatibility of multimedia equipment – emission requirements
EU EMC Standards	EN 61000-6-1:2007 – Generic immunity standard for residential, commercial and light-industrial environments

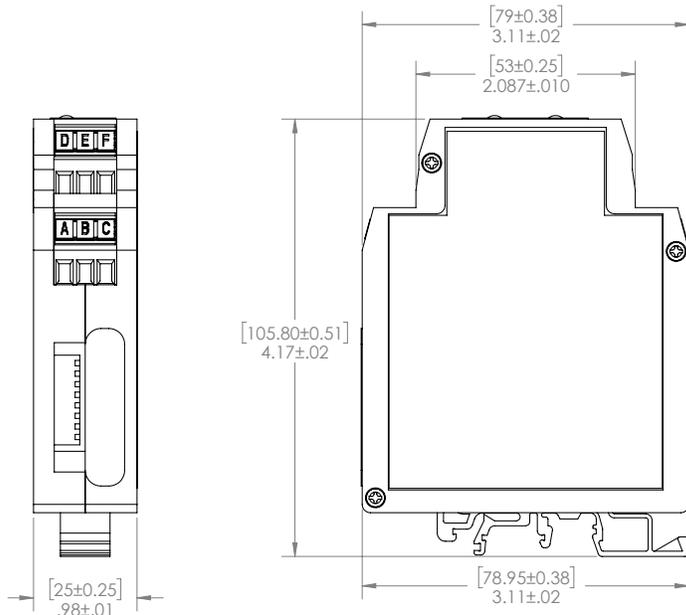

ADVANTECH

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445